



CONTENTS

DGS
COMPACT

• • • • • GENERAL DESCRIPTION



SAMSUNG



Wait Till You Hear What We See

TABLE OF CONTENTS



CONTENTS

GENERAL DESCRIPTION SECTION


PART	DESCRIPTION	PAGE
1	<u>SYSTEM OVERVIEW</u>	
1.1	<u>SIZE AND CONFIGURATION</u>	<u>1.1</u>
1.2	<u>TECHNOLOGY</u>	<u>1.3</u>
1.3	<u>PROGRAMMING</u>	<u>1.3</u>
2	<u>HARDWARE DESCRIPTIONS</u>	
2.1	<u>KEY SERVICE UNIT</u>	<u>2.1</u>
2.2	<u>EXPANSION KIT</u>	<u>2.1</u>
2.3	<u>RAM PACKS</u>	<u>2.2</u>
2.4	<u>INTERFACE CARDS</u>	<u>2.2</u>
2.5	<u>STATION EQUIPMENT</u>	<u>2.3</u>
3	<u>SPECIFICATIONS</u>	
3.1	<u>ELECTRICAL SPECIFICATIONS</u>	<u>3.1</u>
3.2	<u>DIMENSIONS AND WEIGHTS</u>	<u>3.1</u>
3.3	<u>ENVIRONMENTAL LIMITS</u>	<u>3.1</u>
3.4	<u>CABLE REQUIREMENTS</u>	<u>3.2</u>
3.5	<u>SYSTEM TONES</u>	<u>3.2</u>
3.6	<u>KEYSET LED INDICATIONS</u>	<u>3.4</u>
3.7	<u>RESERVE POWER DURATION ESTIMATES</u>	<u>3.4</u>
4	<u>FEATURES</u>	
4.1	<u>SYSTEM FEATURE DESCRIPTIONS</u>	<u>4.1.2</u>
4.2	<u>STATION FEATURE DESCRIPTIONS</u>	<u>4.2.1</u>
4.3	<u>DISPLAY FEATURE DESCRIPTIONS</u>	<u>4.3.1</u>
4.4	<u>SAMPLE SMDR PRINTOUT</u>	<u>4.4.1</u>
4.5	<u>SAMPLE SMDR PRINTOUT WITH CALLER ID</u>	<u>4.5.1</u>
5	<u>USER INFORMATION</u>	
5.1	<u>RADIO FREQUENCY INTERFERENCE</u>	<u>5.1</u>
5.2	<u>FCC REQUIREMENTS</u>	<u>5.1</u>
5.3	<u>TELEPHONE COMPANY INTERFACES</u>	<u>5.2</u>
5.4	<u>SAFETY TESTS</u>	<u>5.3</u>
5.5	<u>MUSIC ON HOLD WARNING</u>	<u>5.3</u>



DCS COMPACT GENERAL SYSTEM DIAGRAM



CONTENTS

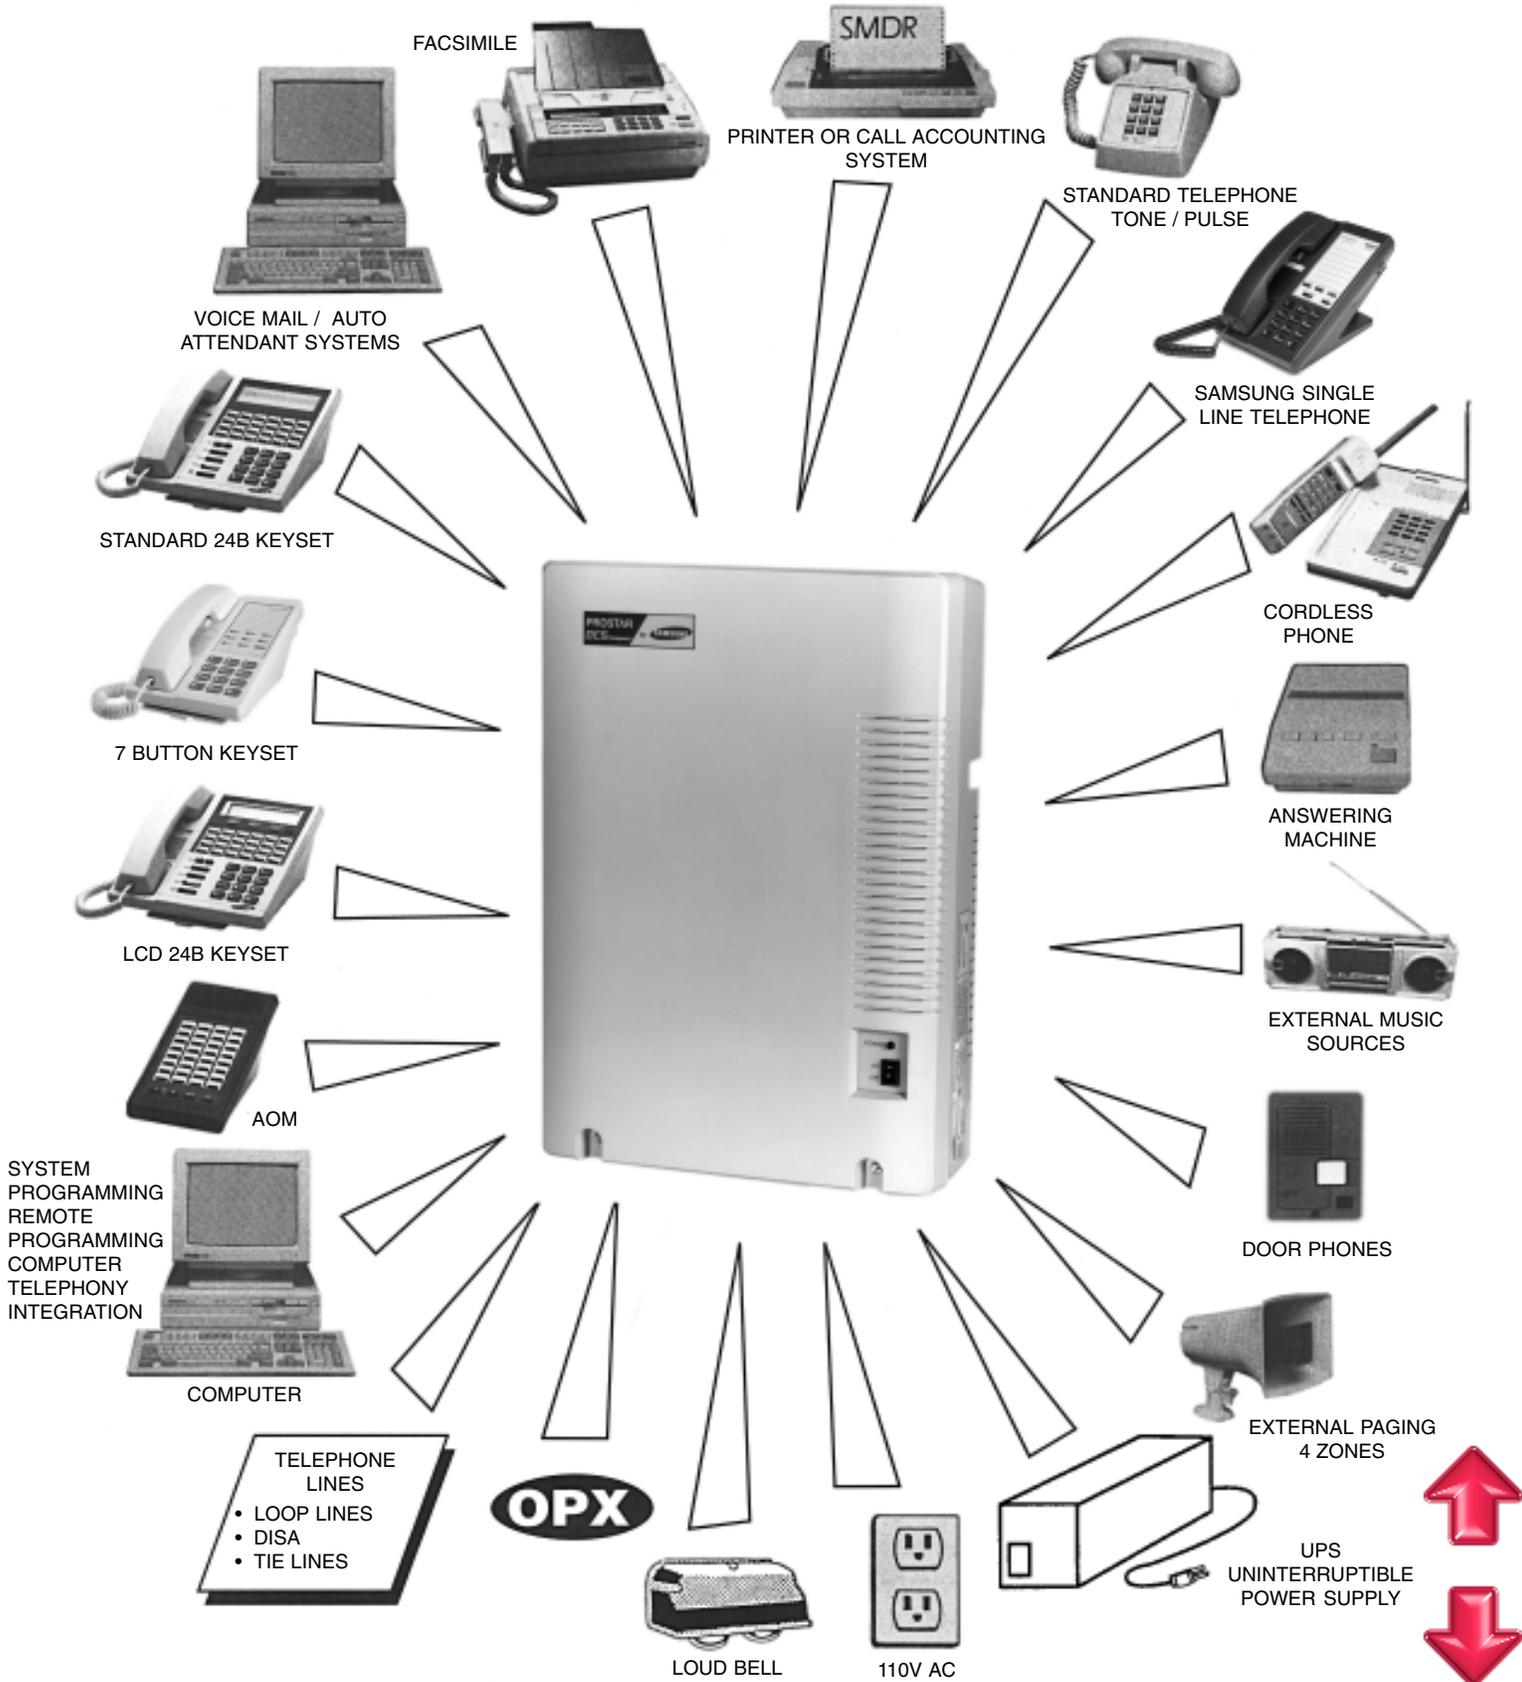







PART 1. SYSTEM OVERVIEW

1.1 SIZE AND CONFIGURATION

The PROSTAR DCS COMPACT is an expandable digital hybrid key telephone system that begins with four C.O. line ports and eight keyset ports and expands to ten C.O. line ports and 22 stations (see Figure 1–1). In addition, up to ten keyset daughterboards may be added to the system to provide the maximum configuration of ten C.O. line ports and 32 stations.

Two types of telephones can be connected to the system: proprietary digital stations called “keysets” that connect to DLI (Digital Line Interface) ports and standard telephone sets, generally called “single line telephones” that connect to SLI (Single Line Interface) ports.

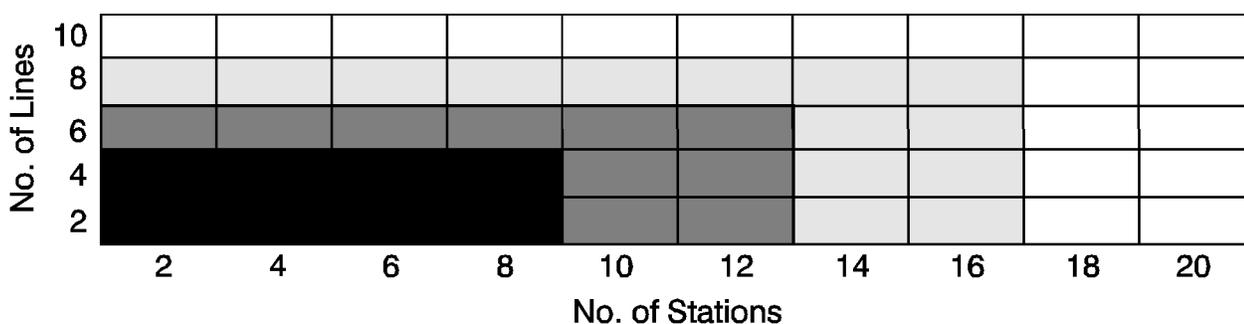


	Basic KSU	4 lines and 8 stations
	Basic KSU and one 2 x 4 expansion card	6 lines and 12 stations
	Basic KSU and two 2 x 4 expansion cards	8 lines and 16 stations
	Basic KSU and three 2 x 4 expansion cards	10 lines and 20 stations
	KDb = Max ten each	10 lines and 30 stations
	2 SLI card	10 lines and 32 stations

The above chart describes configurations using the basic Key Service Unit and 2 x 4 expansion cards. However, by using the DCS COMPACT’s unique keyset daughterboards (KDBs), which are installed in the base of a digital keyset, the capacity of the system can be increased by one station per KDb. Installing a KDb-DLI adds another digital port while a KDb-SLI adds a single line port. Mix and match these two types of KDb for up to a total of ten KDBs in the system. Using this method allows the DCS COMPACT to expand to a maximum of 30 stations. Adding the optional 2 SLI card to the Key Service Unit provides a further two SLI ports. The combination of the basic 4 x 8 Key Service Unit plus three 2 x 4 expansion cards plus ten KDBs plus a 2 SLI card provides a maximum configuration of ten C.O. lines and 32 stations plus miscellaneous circuits.





CONTENTS

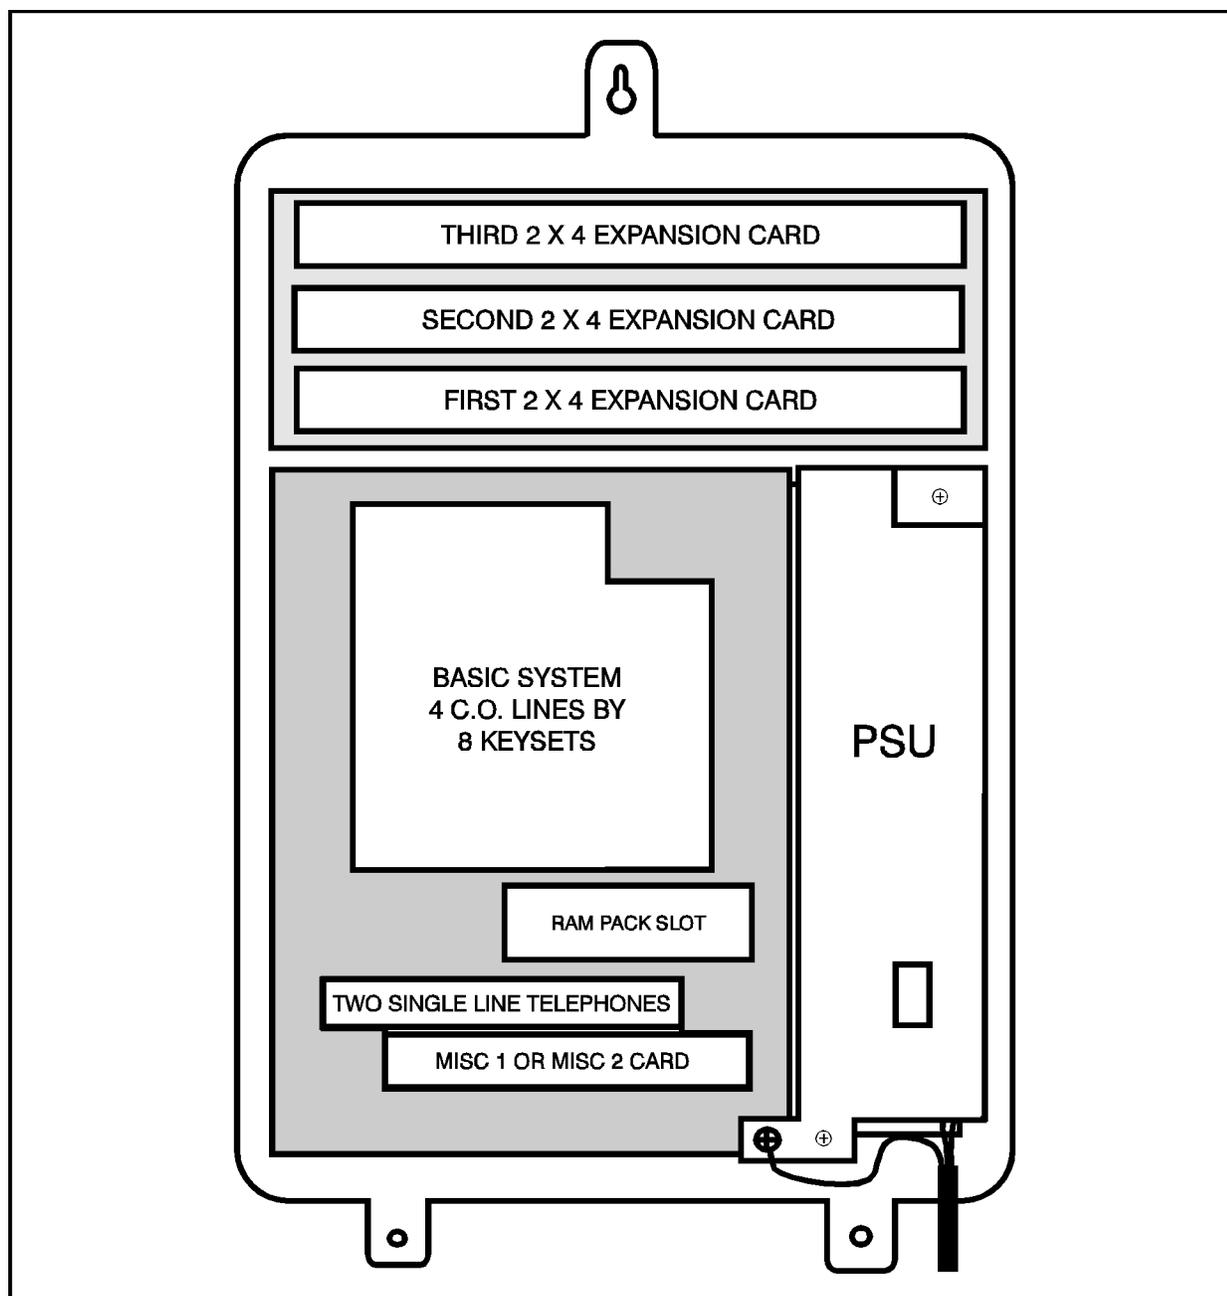

SYSTEM CONFIGURATION

FIGURE 1-1

CONFIGURATION NOTES

1. Only one 2 SLI card can be installed in the system.
2. Only one MISC card can be installed in the system.
3. Only three 2 x 4 cards can be installed in the system.
4. Only ten KDBs can be installed in the system.





1.2 TECHNOLOGY

SWITCHING

System switching is accomplished by means of a custom IC “engine” that provides 256 switchable digital channels. Each of the 256 digital channels is automatically assigned to carry voice or data as required by system operation in a PCM format. In addition to the 256 channels mentioned above, the system also utilizes Digital Signal Processors or DSPs. Each DSP may be configured by the switching control program as a DTMF sender, a DTMF receiver or a C.O. tone detector on a per-call basis. The engine chip contains four DSP channels and an additional four DSPs are added when a MISC card is installed. This means that the system contains a total of eight DSP channels when fully expanded. The DSP channels are fully shared throughout the system as a common resource.

MEMORY

The system operates using stored program control. This program is stored in either two EPROM chips (1024 Kbytes of memory) or four EPROM chips (2048 Kbytes of memory) depending on the feature package. All specific customer data is stored in non-volatile random access memory (NV-RAM) located on the removable RAM pack. It is protected by a Ni-Cd (NICAD) battery providing up to 30 days of memory protection.

MICROPROCESSORS

The DCS COMPACT uses distributed processing. The system’s primary processor is a 16 bit Motorola® MC68000 operating at a clock speed of 8 MHz. The secondary level of processing is done in the keysets. The digital keyset uses a Hitachi H8 processor for data communication within the DCS COMPACT.

1.3 PROGRAMMING

The DCS COMPACT comes with default data. This data provides for operation within seconds after applying power. All trunks and stations are assigned according to the default numbering plan. This numbering plan is flexible and may be changed if so desired. The technician customizes this default data to meet the end user’s requirements.

The system can be programmed from any display keyset without interrupting normal system operation. There are three levels of programming: TECHNICIAN, CUSTOMER and STATION. The technician level has access to all programs and can allow the customer access to system programs as needed. Technician and customer access are controlled by different security passcodes.

The DCS COMPACT also allows the use of a proprietary computer program called CPCMMC. This permits a technician to program the system using a personal computer. CPCMMC can be used on-site to modify the customer database or to *download* (save) the entire customer database to a file. This file can then be saved as a backup and uploaded when required to restore the database.

Through the use of modems, CPCMMC can access a DCS COMPACT system remotely (off-site) to make database changes or perform uploads or downloads of the customer database as if the technician were on-site.





PART 2. HARDWARE DESCRIPTIONS

2.1 KEY SERVICE UNIT

The DCS COMPACT Key Service Unit (see Figure 2–1) is a single plastic cabinet containing the following:

- A power supply
- Processing, switching and the system operating program
- Four Caller ID compatible loop start C.O. interfaces with a replaceable 4 C.O. protection card (4COP)
- Eight 2B+D digital keyset interfaces
- One MOH/BGM input
- One page output
- One auxiliary relay
- Power failure circuits for the first two C.O. lines



FIGURE 2–1

2.2 EXPANSION KIT

The optional expansion kit (see Figure 2–2) consists of a backplane PCB with connectors for three 2 x 4 expansion cards and a plastic rack to support the cards. The kit is installed inside the basic KSU and connects to the KSU motherboard via a 50 pin ribbon cable and two pairs of ground wires.

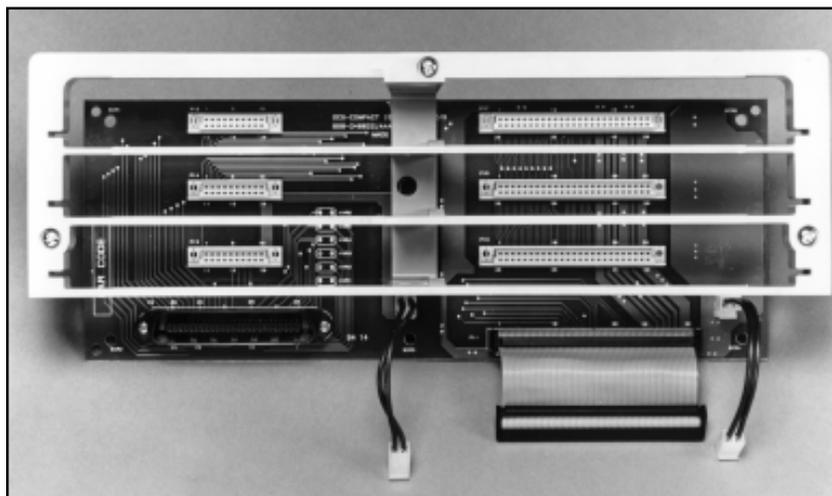


FIGURE 2–2





CONTENTS

2.3 RAM PACKS

To operate, the KSU must be equipped with a RAM pack to hold the customer database (see Figure 2–3). There are two types of RAM pack available—RAM packs 1 and 2, described below.

RAM PACK 1 contains:

- Customer database contained in 256 Kbytes of battery protected memory and the Real Time Clock circuit

RAM PACK 2 contains:

- Customer database contained in 256 Kbytes of battery protected memory and the Real Time Clock circuit
- Additional 256 Kbytes of battery-protected memory for the Caller ID features and to increase the speed dial library to 1500 numbers



FIGURE 2–3

2.4 INTERFACE CARDS

- A. The **2 SLI** card is installed in a dedicated slot on the KSU motherboard. The card provides two single line telephone interfaces equipped with OPX protection and the ability to provide a loop disconnect signal.
- B. The **2 x 4 DLI** card provides two Caller ID-compatible loop start C.O. interfaces and four 2B+D DLI ports.
- C. The **2 x 4 SLI** card provides two Caller ID-compatible loop start C.O. interfaces, four SLI ports for industry standard single line telephones and the ability to provide a loop disconnect signal. NOTE: This card does not provide OPX protection.
- D. The **2 E & M x 4 DLI** card provides two two wire (TL11M) tie line interfaces and four 2B+D DLI ports.
- E. The **MISC 1** card provides a second MOH/BGM input, four page zone control relays, two serial I/O ports and four DSP circuits. It is recommended that this card be used in situations requiring heavy single line telephone use.
- F. The **MISC 2** card is similar to the MISC 1 but with the addition of Caller ID decoding circuits.
- G. The **KDb-DLI** board, if installed in a digital keyset, will provide a second DLI port for the connection of a digital station device.
- H. The **KDb-SLI** board, if installed in a digital keyset, will provide an SLI port for the connection of a standard telephone device. NOTE: The SLI port on a KDb-SLI cannot provide disconnect signal or OPX protection.





CONTENTS

2.5 STATION EQUIPMENT

LCD 24B Keypad (See Figures 2–4)

- Built-in speakerphone
- 24 programmable keys (16 with tri-colored LEDs)
- Four fixed function keys
- 32 character display (2 x 16) with three associated soft keys and a scroll key
- UP/DOWN buttons for digital control of speaker, handset and ringer volumes
- Eight selectable ring tones
- Desk- or wall-mounted
- Available in almond or charcoal



FIGURE 2–4

STD 24B Keypad (See Figures 2–5)

- Built-in speakerphone
- 24 programmable keys (16 with tri-colored LEDs)
- Four fixed function keys
- UP/DOWN buttons for digital control of speaker, handset and ringer volumes
- Eight selectable ring tones
- Desk- or wall-mounted
- Available in almond or charcoal



FIGURE 2–5

LCD 12B Keypad (see Figures 2–6)

- 32 character display (2 x 16) with three associated soft keys and a scroll key
- Built-in speakerphone
- 12 programmable keys (six with tri-colored LEDs)
- Four fixed function keys
- UP/DOWN buttons for digital control of speaker, handset and ringer volumes
- Eight selectable ring tones
- Desk- or wall-mounted
- Available in almond or charcoal



FIGURE 2–6





CONTENTS

Basic 12B Model Keypad

(see Figures 2–7)

- Built-in speakerphone
- 12 programmable keys (six with tri-colored LEDs)
- Four fixed function keys
- UP/DOWN buttons for digital control of speaker, handset and ringer volumes
- Eight selectable ring tones
- Desk- or wall-mounted
- Available in almond or charcoal



FIGURE 2-7

7 Button Model Keypad (see Figures 2–8)

- 7 programmable keys
- Three fixed function keys
- UP/DOWN buttons for digital control of speaker and ringer volumes
- Eight selectable ring tones
- Desk or wall mounted
- Available in almond or charcoal



FIGURE 2-8

32 Button Add-On Module (AOM)

(see Figures 2–9)

- 32 programmable keys
- Two fixed function keys
- UP/DOWN buttons for digital control of speaker and ringer volumes
- Available in almond or charcoal
- One or two can be assigned to any DCS keypad to provide executive off-hook voice announce and additional programmable keys (see Figure 2–10)
- Can operate as a stand-alone handsfree telephone unit



FIGURE 2-9





CONTENTS



FIGURE 2-10

Door Phone Interface Module (DPIM) and Door Phone (see Figures 2-11 and 2-12)

- The DPIM adapts any DLI circuit for use with the door phone unit
- Commonly used to request entry through locked doors (interior or exterior) or as a room monitoring box
- Provides contact control to be used with customer-provided electric door lock
- Door phone is wall-mounted
- Door phone is weather resistant



FIGURE 2-11

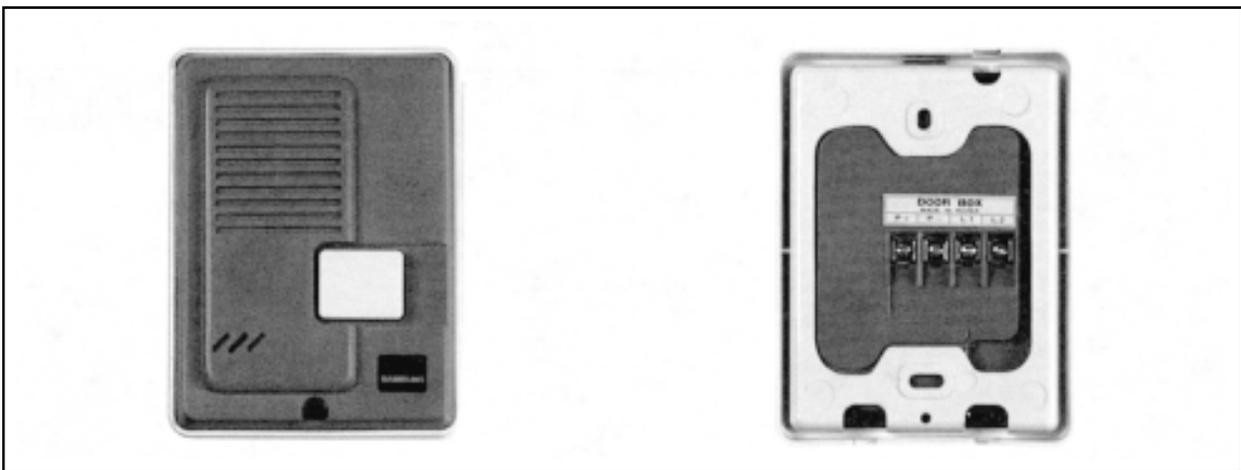


FIGURE 2-12





Computer Telephony Module (CTM) (See Figure 2–13)

- Provides RS232 connection via DB9 for TAPI applications
- Connects with any DLI port



FIGURE 2–13

Single Line Telephone (See Figure 2–14)

- Four fixed function keys: hold, flash, new call, and monitor.
- Data Port: selectable to share station extension or utilize a separate extension
- On hook dialing
- Message Waiting/Ring Indicator
- Desk or wall mounted
- Ring volume control
- Four available ring tones.
- Available in almond and black



FIGURE 2–14

Note: This single line telephone set is
FCC approved for direct connection
to the public telephone network.
FCC # A3LKOR-24627-TE-T REN 0.9B
UL LISTED 19X9 FILE # ETI 8093





CONTENTS

PART 3. SPECIFICATIONS

The following tables provide technical data for the DCS COMPACT hybrid/key telephone system.

3.1	ELECTRICAL SPECIFICATIONS	
AC INPUT	120 (88–132) VAC (48–63 Hz)	
POWER CONSUMPTION (MAX)	97 WATTS MAXIMUM FUZE RATING 3 AMP	
BTU RATING (MAX)	5.5 BTU/MINUTE	
DC OUTPUT	+5 VOLTS 2.0 AMPS MAX –5 VOLTS 0.5 AMPS MAX –48 VOLTS 1.0 AMPS MAX	

3.2	DIMENSIONS AND WEIGHTS			
	HEIGHT	WIDTH	DEPTH	WEIGHT
DCS COMPACT BASIC SYSTEM: SINGLE CABINET	22.5"	14.25"	5"	16 lb.
EXPANDED SYSTEM	22.5"	14.25"	5"	22 lb.
DIGITAL KEYSSET (ALL MODELS)	4.25"	8.50"	9"	2 lb. 9 oz.
ADD-ON MODULE	4.25"	4.25"	9"	1 lb. 3 oz.
DOOR PHONE	5"	3.88"	1.25"	6.8 oz.

3.3	ENVIRONMENTAL LIMITS	
OPERATING TEMPERATURE	32–104 °F/1–40 °C	
STORAGE TEMPERATURE	-13–158 °F/-10.5–70 °C	
HUMIDITY	10%–90% NON-CONDENSING	





CONTENTS

3.4	CABLE REQUIREMENTS			
EQUIPMENT	CABLE	AWG	MAX FEET	MAX METERS
DIGITAL KEYSETS	1 PR. TWISTED	24	1300	400
ADD-ON MODULES	1 PR. TWISTED	24	1300	400
SINGLE LINE STATION	1 PR. TWISTED	24	3000	1 KM
DOOR PHONE	2 PR. TWISTED	24	330*	100

*This is the maximum length of the cable between the door phone and the DPIM. The DPIM can be installed up to 900 cable feet from the KSU.


3.5	SYSTEM TONES	
TONE	FREQUENCIES	CADENCE
DIAL TONE 350 + 440 Hz	CONTINUOUS	
RING BACK TONE	440 + 480 Hz	1 sec on + 3 sec off
BUSY TONE	480 + 620 Hz	0.5 sec on + 0.5 sec off
DND/NO MORE CALLS	480 + 620 Hz	0.25 sec on + 0.25 sec off
ERROR TONE	480 + 620 Hz	0.25 sec of each tone
CONFIRMATION TONE	350 + 440 Hz	Three bursts of tone 0.1 sec on + 0.1 sec off
TRANSFER/CONF	350 + 440 Hz	0.1 sec on + 0.1 sec off






SYSTEM TONES

Intercom Dial Tone—A steady tone that indicates you can begin dialing.

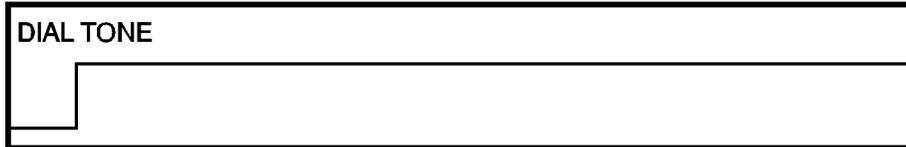


CONTINUOUS

Ringback Tone—Indicates the station you dialed is ringing.

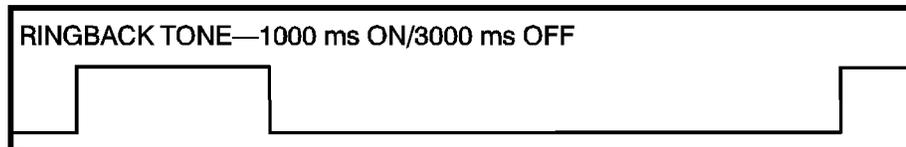


CONTINUOUS

Busy Signal—Indicates the station you dialed is busy.

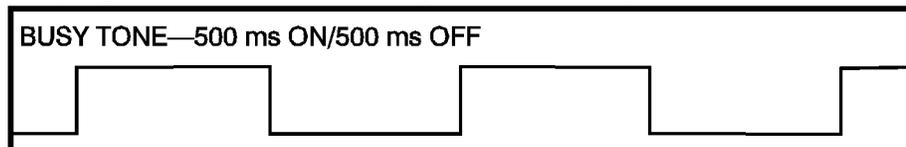


CONTINUOUS

DND/No More Calls Tone—Fast busy tone advises you the station you dialed is in the Do Not Disturb mode or cannot receive any more calls.

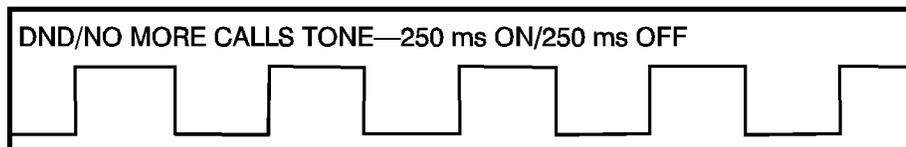


FOR TEN SECONDS

Transfer/Conference Tone—Indicates your call is being held and you can dial another party.

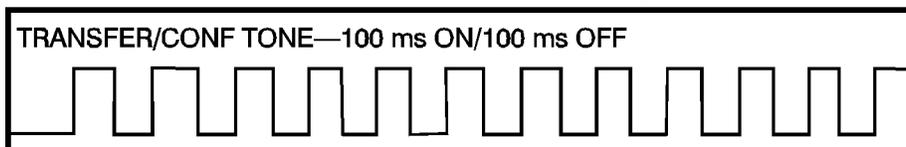


CONTINUOUS

Confirmation Tone—Very short beeps followed by dial tone indicate you have correctly set or canceled a system feature.

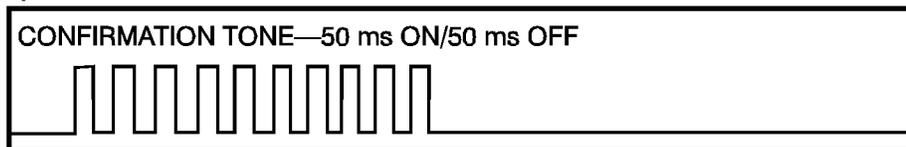

FOR TWO SECONDS

ERROR TONE—A distinctive two level beeping tone indicates you have done something incorrectly. Try again.

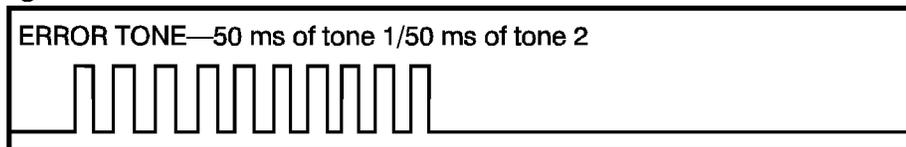

FOR TWO SECONDS





3.6	KEYSET LED INDICATIONS		
CONDITION	LED COLOR	LED ON	LED OFF
LINE IDLE	OFF	–	OFF
LINE IN USE	RED/GREEN	STEADY	–
RECALL	AMBER	500 ms	500 ms
CALL ON HOLD	RED/GREEN	500 ms	500 ms
RINGING C.O. CALL	RED/GREEN	100 ms	100 ms
RINGING INTERNAL CALL	GREEN	100 ms	100 ms
DND INDICATION	RED	100 ms ON/100 ms OFF for 500 ms	500 ms

3.7	RESERVE POWER DURATION ESTIMATES (in minutes)*						
NO. OF STATIONS	UPS CAPACITY IN VOLT AMPS (VA)						
	250	400	450	600	900	1250	2000
4	65	160	200	245	360	490	930
8	45	110	135	160	240	320	625
12	40	90	115	140	200	280	535
16	30	75	90	110	160	220	415
24	25	50	70	85	120	175	380
32	20	45	60	75	100	150	330

*These are approximate values based on an idle system. The greater the C.O. line activity on the system, the lower these readings will become. In addition, specific UPS devices, due to their internal construction, can have greater or lesser values.





PART 4. FEATURES

SYSTEM FEATURES

Account Code Entry	Distinctive Ringing	Station Message Detail Recording (SMDR)
Forced	Door Lock Release (Programmable)	System Alarms
Voluntary	Door Phones	System Directory
All Call Voice Page	Door Phone Night Ring	Toll Restriction
Attention Tone	E & M Tie Lines	By Day or Night
Authorization Codes	Executive Barge-In (Override)	By Line or Station
Forced	Station or Trunk	Eight Dialing Classes
Voluntary	With/Without Warning Tone	Special Code Table
Automatic Hold	Executive/Secretary Pooling	Toll Restriction Override
Background Music	External Music Interfaces	Tone or Pulse Dialing
Caller ID†	External Page Interfaces	Transfer
Name/Number Display	Flash Key Operation	Screened/Unscreened
Next Call	Flexible Ringing	Voice Mail Transfer Key
Save CID Number	Day Ring Assignments	With Camp-On
Store CID Number	Night Ring Assignments	Trunk Groups (11)
Inquire Park/Hold	Hot Line	Universal Answer
CID Review List	In Group/Out of Group	Voice Mail Integration
Investigate	Incoming Call Distribution	Walking Class of Service
Abandon Call List (50)	Incoming/Outgoing Service	
CID on SMDR	Individual Line Control	
Number to Name Translation (250)	Least Cost Routing	
Call Forwarding	Live System Programming	
All Calls	From any Display Keypad	
Busy	With a Personal Computer	
No Answer	Meet Me Page and Answer	
DND	Memory Protection	
Busy/No Answer	Message Waiting Instructions	
Follow Me	Microphone On/Off per Station	
External	Music on Hold—Flexible	
To Voice Mail	Night Service	
Call Hold	Automatic	
Exclusive	Manual	
System	Off Premises Extensions (OPX)	
Remote	Operator Group	
Call Park and Page	Overflow	
Call Pickup	Operator	
Directed	Station Group	
Groups (20)	Paging	
Call Waiting/Camp-On	Internal Zones (4)	
Centrex/PBX Use	External Zones (4)	
Chain Dialing	All Internal	
Class of Service	All External	
Common Bell Control	Page All	
Conference	Power Failure Transfer	
Add On (5 Party)	Primeline Selection	
Unsupervised	Private Lines	
Computer Telephony Integration (CTI)†	Programmable Line Privacy	
TAPI	Programmable Timers	
Data Security	Recalls	
Database Printout	Remote Programming—PC	
Dialed Number Identification Service (DNIS)†	Ring Over Page	
Day/Night Routing	Single Line Connections	
Busy or Camp-On Option	Speed Dial Numbers (1500)	
Direct In Lines	Station List (50 Max)	
Direct Inward Dialing (DID)†	System List (500 Max)	
Day/Night Routing	Speed Dial by Directory	
Busy or Camp-On Option	Station Hunt Groups (30)	
Direct Inward System Access (DISA)	Distributed	
Direct Trunk Selection	Sequential	
Directory Names	Unconditional	
DISA Security		

†Requires optional hardware and/or software. Ask your dealer for details.





4.1 SYSTEM FEATURE DESCRIPTIONS

ACCOUNT CODE ENTRY

Station users may enter an account code (maximum 12 digits) before hanging up from a call. This account code will appear in the SMDR printout for that call record. Keypad users may enter this code using an account (ACCT) key without interrupting a conversation. Single line set users must temporarily interrupt the call by hook-flashing and dialing the feature access code. Account codes can be up to 12 digits long. Characters can include the digits 0–9.

FORCED

When forced, they are always verified from a system list of 250 entries. Account codes are always printed on the SMDR report. Account codes can be up to 12 digits long. They can contain the digits 0–9.

VOLUNTARY

Users may elect to enter an account code for any call. Characters can include the digits 0–9, star (*) and #.

ALL CALL VOICE PAGE

Users can page all the internal and all the external paging zones at the same time by dialing the All Page code. Keypads may be restricted from making or receiving pages in system programming. A maximum of 30 keypads can be programmed to receive page announcements.

ATTENTION TONE

To get your attention, a brief tone precedes all page announcements or intercom voice calls. There are separate programmable duration timers for page and voice announcement tones.

AUTHORIZATION CODES

Authorization codes are used to give permission to make a call. These four digit authorization codes can be either forced or voluntary. When used, authorization codes will automatically change the dialing station's class of service to the level assigned to the authorization code. Authorization codes may or may not be programmed to print on SMDR.

FORCED

When a station is programmed for forced authorization the user must always enter this code before dialing is allowed. The dialed authorization code is verified from a system list of 100 entries.





VOLUNTARY

Any station user can always enter an authorization code before he/she begins dialing. The dialed authorization code is verified from a system list of 100 entries.

AUTOMATIC HOLD

While a keyset user is engaged on an outside (C.O.) call, pressing another trunk key, route key or CALL button automatically places the call on hold when this feature is enabled. Pressing TRANSFER, CONFERENCE, PAGE or a DSS key will always automatically place a C.O. call on hold. Intercom calls can only be automatically held by pressing the TRANSFER or CONFERENCE keys. Each keyset user can enable or disable automatic hold.

BACKGROUND MUSIC

Keyset users may choose to hear music through their keyset speakers when optional external sources are installed. Each user may adjust this level by the use of a volume control program at the selected keyset.

CALLER ID

This feature requires that optional software and hardware be installed in the DCS COMPACT KSU. In addition, the Caller ID service must be provided by your local telephone company. The availability of the calling party name or number depends on the type of CID service offered by your local telephone company. The Caller ID feature is dependent on having an LCD keyset to show the name or number in the top line of the display.

NOTE: Requires optional hardware and/or software. Ask your dealer for details.

NAME/NUMBER DISPLAY

Each LCD keyset user can decide if he/she wants to see the CID name or CID number in the display. Regardless of which one is selected to be seen first, the N/N key is pressed to view the other piece of CID information.

NEXT CALL

In the event that you have a call waiting or a camped-on call at your keyset, you can press the NEXT key to display the Caller ID information associated with this next call in queue at your station. Either the CID name or CID number will show in the display depending on your N/N selection.

SAVE CID NUMBER

At any time during an incoming call that provides CID information, you may press the SAVE key. This saves the CID number in the Save Number feature. Pressing the SAVE number redial key will dial the CID number. The system must be using LCR to dial the saved number.





STORE CID NUMBER

At any time during an incoming call that provides CID information, you may press the STORE key. This saves the CID number as a speed dial number in your personal speed dial list. The system must be using LCR to dial the stored number.

INQUIRE PARK/HOLD

Having been informed that an incoming call is on hold or has been parked, you may view the Caller ID information before you retrieve the call. This will influence how you choose to handle the call.

CID REVIEW LIST

This feature allows display keyset users to review CID information for calls sent to their stations. This list can be from ten to fifty calls in a first-in, first-out basis. The list includes calls that you answered and calls that rang your station but that you did not answer. When reviewing this list, you can press one button to dial the person back. The system must be using LCR to dial the stored number.

INVESTIGATE

This feature allows selected stations with a special class of service to investigate any call in progress. If CID information is available for an incoming call, you will know to whom this station is speaking. On outgoing calls, you can see who was called. After investigating, you may barge-in on the conversation, disconnect the call or hang-up.

WARNING: Barge-in without tone may violate state or federal laws concerning the right to privacy. STA is in no way responsible for the misuse of this feature.

ABANDON CALL LIST (50)

The system has a system-wide abandon call list that stores CID information for the last 50 calls that rang but were not answered. The list is accessed using the system administrator passcode. When reviewing this list, you are provided options to CLEAR the entry or DIAL the number. You can use the NND key to toggle between the CID name, CID number and the date and time the call came in. The system must be using LCR to dial numbers from the abandon call list.

CID ON SMDR

The Station Message Detail Records report can be set to include CID name and number for incoming calls. This format expands the print out to 113 characters. You must use a wide carriage printer or an 80 column printer set to the condensed print option.

NUMBER TO NAME TRANSLATION (250)

The system provides a translation table for 250 entries. When the CID number is received, the table is searched. When a match is found, the system will display the corresponding name. This will allow users in areas that do not support deluxe Caller ID to provide names for regular callers.





CALL FORWARDING

This feature allows the user to redirect (forward) incoming calls. The calls can be redirected to the attendant, a hunt group, voice mail, external number or another station user. If the destination station is in DND, the calling party will receive DND/REORDER tone. Calls cannot be forwarded to a door phone.

FORWARD ALL CALLS

A maximum of 30 keysets can be programmed to receive page announcements. This type of forwarding is not affected by the condition of the station. All calls are immediately redirected to the designated destination. If it is desired, the destination station may redirect the call back to the forwarded station by using the transfer feature. The forwarded station user can continue to originate calls as usual. DSS keys for stations that are forwarded all will flash slow red.

FORWARD BUSY

This feature forwards all calls only when the station set is busy. The station user can originate calls as usual.

FORWARD NO ANSWER

This feature forwards calls that are not answered within a preprogrammed time. The station user can originate calls as usual and receive calls if present. The timer is programmable on a per-station basis to allow for differences in individual work habits.

FORWARD DND

This feature works with the Do Not Disturb feature. This allows calls directed to a station in Do Not Disturb or One Time Do Not Disturb to forward immediately to another destination.

FORWARD BUSY/NO ANSWER

This feature allows the station user to use both of these types of forwarding simultaneously, provided the destinations have already been entered in the usual manner.

FORWARD FOLLOW ME

This feature allows the station user to forward all calls from another station to the user's station or change the forward destination to the extension you are at now.

FORWARD EXTERNAL

This feature forwards C.O. calls to an external number via a central office trunk if allowed by class of service. These C.O. calls will only forward after the programmable external call forward delay timer expires.





FORWARD TO VOICE MAIL

Each station may be programmed to allow or deny the ability to forward intercom calls to voice mail. When denied this can save valuable message time in the voice mail system.

CALL HOLD (EXCLUSIVE)

Outside calls can be placed on exclusive hold at any keyset by pressing the HOLD key twice during a call. Calls placed on exclusive hold can only be retrieved at the keyset that placed the call on hold. Intercom calls are always placed on exclusive hold.

CALL HOLD (SYSTEM)

Outside calls can be placed on system hold at any station. Users may dial the access code or press the HOLD button. Calls on system hold may be retrieved at any station.

CALL HOLD (REMOTE)

Outside calls can be placed on hold at a remote station. This feature allows calls to be answered at one keyset and placed on hold at another station. This allows time for the user to proceed to that station or allows the party that the call was intended for to have that call placed at their station. The call or trunk button will flash at the remote hold station.

CALL PARK AND PAGE

Each C.O. line has its own park zone. This simple method eliminates confusion and ensures that a park zone is always available. Pressing the PAGE key parks the call automatically. There are no extra buttons to press and there is no lost time looking for a free zone.

CALL PICKUP

With directed call pickup, users can answer calls ringing at any station by dialing a code plus that station's extension number. Calls can be picked up from a station group in a similar manner. The group pickup feature allows users to answer any call ringing within a pickup group. There are 20 pickup groups available. A station cannot be in more than one pickup group. To employ this feature, users either dial the access code or press the assigned feature button followed by the pickup group number.

CALL WAITING/CAMP-ON

Busy stations are notified that a call is waiting (camped-on) when they receive a tone. The tone will be repeated at a programmable interval. Keysets receive an off-hook ring signal through the speaker and single line stations receive a tone in the handset. The volume of the camp-on tone can be set by the station user. Camped-on calls will follow Forward No Answer if a Forward No Answer destination has been set.





CENTREX/PBX USE

CENTREX and PBX lines can be installed in lieu of central office trunks. CENTREX and PBX feature access codes including the command for hook-flash (FLASH) can be stored under one touch buttons. Toll restriction programming can ignore PBX or CENTREX access codes so toll calls can be controlled when using these services.

CHAIN DIALING

Station users may manually dial additional digits following a speed dial call or chain together as many speed dial numbers as are required.

CLASS OF SERVICE

The system allows a maximum of 30 station classes of service. Each class of service can be customized in memory to allow or deny access to features and to define a station's dialing class. Each station can be assigned different classes of service for day and night operation.

COMMON BELL CONTROL

Each KSU provides a dry contact pair to control a customer-provided common bell or common audible device. These contacts must be programmed as members of a station group and may provide steady or interrupted closure.

COMPUTER TELEPHONY INTEGRATION (CTI)

Computer Telephone Integration (CTI) allows integration between the Prostar DCS COMPACT and a personal computer system (PC). Caller ID service is required on TAPI inbound call applications that use the CID information to display computer records in conjunction with the presentation of the call to the station on the DCS COMPACT Release 2 system. TAPI is described below.

TAPI

Jointly developed by Intel and Microsoft, TAPI (Telephony Applications Programming Interface) delivers telephony features to the Windows desktop. TAPI is an open application interface (OAI) protocol that supports First Party Call Control. A DCS Computer Telephony Module (CTM) is required to connect any keyset to a personal computer running Windows 3.1 or Windows 95. The number of CTMs that can be installed on a system is only limited to the number of keyphones. The features and functionality of the DCS keyset are not changed.

CONFERENCE

Any combination of up to five parties (stations or outside lines) can be joined together in an add-on conference. A station user may set up a conference with two or more outside lines and then exit the conference leaving the outside lines connected in an unsupervised (trunk to trunk) conference. The system allows five simultaneous conferences.





DATA SECURITY

Single line extensions used with modems and facsimile machines can be programmed so that they will not receive any system-generated tones that would disrupt data transmissions. In addition, these devices will receive DCS COMPACT C.O. ringing pattern instead of intercom ring pattern. Devices connected to a 2 SLI card or a 2 x 4 SLI card will receive a disconnect signal upon termination.

DATABASE PRINTOUT

A copy of the customer database can be obtained using CPCMMC. This information can be directed to an image file for later printing or to the PC screen and may be done either on-site or remotely. A complete database or specific data blocks may be obtained.

DIAL BY NAME

SYSTEM SPEED DIAL LIST

Each system speed dial number can have an associated directory name. A speed dial number can be selected by scrolling alphabetically through the directory name list. This on-line “directory” allows the user to look up and dial numbers in seconds.

PERSONAL SPEED DIAL LIST

Each personal speed dial number can have an associated directory name. A speed dial number can be selected by scrolling alphabetically through the directory name list. This on-line “directory” allows the user to look up and dial numbers in seconds.

STATION DIRECTORY LIST

Each station can have an associated directory name. A station can be selected by scrolling alphabetically through the directory name list. This on-line “directory” allows the user to look up and dial other users in seconds.

DIRECT IN LINES

Outside lines may be programmed to bypass the operator(s) and ring directly at any station or group of stations.

DIRECT INWARD SYSTEM ACCESS (DISA)

Users can call in on specific DISA lines at any time, input a security code and receive system dial tone. Users can now place internal calls or if permitted, calls using C.O. lines. The caller must have a tone dial phone and know his/her DISA security code. DISA lines can be used as both-way lines or incoming only. The C.O. lines used for DISA must have disconnect supervision.

DIRECT TRUNK SELECTION

Each station can be allowed or restricted access to a trunk or trunk group by access code when LCR is activated. When restricted, the user must use a trunk key or route key.





DISA SECURITY

Telephone fraud and long distance theft continue to increase; therefore, we have introduced a DISA security system. If an incorrect DISA passcode is entered repeatedly (as is the case with “hackers”), the DISA system can be automatically disabled temporarily. Both the number of incorrect passcode attempts and the time that DISA is disabled are programmable. In addition, all failed attempts to access DISA will print on SMDR (if provided) with a “DE” DISA error flag.

WARNING: As it is impossible to prevent unauthorized access to your telephone system by hackers, we suggest that you do not turn the DISA feature on unless you intend to use it. If you do use this feature, it is good practice to frequently change passcodes and periodically review your telephone records for unauthorized use.

DISTINCTIVE RINGING

Users will know the type of call they receive by the type of ring that they hear. Outside calls have a single ring repeated while internal calls have a double ring repeated.

DIRECT INWARD DIALING (DID)

The DCS COMPACT can use local telephone company-provided DID service via an E & M trunk. When programmed, anyone dialing a user’s personal number rings directly to that user’s office. DID calls to a busy station have the option to return busy signal to the C.O. or return ringback to the C.O. When ringback is selected, the called station receives off-hook ring. Multiple DID numbers can ring the same extension or station group and display keysets show a DID directory name when ringing if a name has been programmed. DID calls can be assigned both a day and night ring destination. This allows routing of DID calls that have one destination during the system Day mode to be routed to a different destination during the system Night mode. DID calls that are directed to ring a voice mail machine can be identified by a special digit ([see Voice Mail Integration](#)). As it is possible to program E&M trunks to follow the DID translation tables, the system can use both way DID type service.

DNIS (DIALED NUMBER IDENTIFICATION SERVICE)

DNIS is an incoming service provided by the telephone service provider that translates the 10 or 11 digit numbers dialed into 3 or 4 digits, then sends them into the DCS COMPACT. The DCS COMPACT is considered enhanced because it provides separate day and night destinations with name display allowing greater call coverage. The DCS COMPACT supports DNIS on E&M tie line service.

DOOR LOCK RELEASE (PROGRAMMABLE)

After answering a call from the door phone, users can dial a code to activate a contact closure. This can be used to operate a customer-provided electric door lock release mechanism. The contact closure timer is programmable from 100–2500 ms.





DOOR PHONES

The door phone interface module (DPIM) provides for connection of a door phone to a DLI port. Pressing the button on the door phone will give a distinctive ring (three short rings repeated) at the assigned station or station group. If not answered within a programmable time, the system will release the door phone and stop ringing. Stations may call the door phone directly and monitor the surrounding areas.

DOOR PHONE NIGHT RING

The night ring destination of door phone calls may be different than during the day. For example, large factories may want these calls directed to a security desk after hours.

E & M TIE LINES

Your office can be connected to another office with a tie line. Use this to make calls to stations in the other system. If programming allows, you can access lines in the other system to make outside calls. Tie line calls can be put on hold, transferred and conferenced in the same way as are other outside calls. Users accessing the tie line from the other system can get a line in your system and make outgoing calls. These calls can be controlled by assigning a dialing class to the tie line. Your local telephone company may use E & M tie lines to provide DID service. [See DID.](#)

EXECUTIVE BARGE-IN (OVERRIDE)

The feature allows specially programmed stations with a barge-in key to override the automatic privacy of another station. Programming will allow barge-in with or without a warning tone. Stations may also be programmed as “secure” so that they cannot be barged-in on.

WITHOUT WARNING TONE

When the barge-in without tone option is set, the barging-in keyset has its microphone muted and the barged-in on station will not receive an override display. This feature will not work from single line sets.

WARNING: Barge-in without tone may violate state or federal laws concerning the right to privacy. Samsung Telecommunications America is in no way responsible for the misuse of this feature.

EXECUTIVE/SECRETARY POOLING

Each keyset may be defined as a BOSS or a SECY in system programming. Each BOSS can have up to four SECYs and each SECY can have up to four BOSSes. These arrangements are known as executive/secretary pools. There can be multiple pools in a system. When a BOSS is in DND, all calls to the BOSS will ring the first SECY assigned to that BOSS; if that SECY is busy, the call will hunt to the next available SECY assigned to that BOSS. If the SECY must communicate with the BOSS while he/she is in DND, pressing the corresponding BOSS button on the SECY’s keyset



will result in an Auto Answer intercom call being made to the BOSS (providing the BOSS is free). A station can be the BOSS of only one SECY pool.



EXTERNAL MUSIC INTERFACES

The system provides an interface for connecting a customer-provided external music source and the addition of a MISC card provides a second interface. These interfaces can be used for background music, station music on hold or trunk music on hold.

EXTERNAL PAGE INTERFACE

The system provides one external page audio output. The addition of a MISC card will provide up to four external zone control relays. Multiple relays may be assigned to a page zone.

FLASH KEY OPERATION

While a user is on an outside line, pressing the FLASH key will flash the central office or PBX. This is used for custom calling features on C.O. lines or in conjunction with CENTREX/PBX operation. System programming allows individual flash times for C.O. and PBX lines. When C.O. or PBX flash is not required, setting the timers for two seconds will release the existing call and return dial tone to make a new call.

FLEXIBLE NUMBERING

System programming allows stations to have two, three or four digit extension numbers beginning with the digit 2 or 3. Default extension numbers begin with 201. Station hunt group access codes can be two or three digits beginning with the digit 5. These can be changed but doing so will affect other feature access codes. All user guides are written using the default numbering plan.

FLEXIBLE RINGING

Outside lines can be programmed to ring at any station or station group. Each line can be assigned a day ring destination and a night ring destination.

HOT LINE

Stations can be programmed to call a pre-defined station or station group as soon as the handset is lifted. A programmable hot line delay timer (1–250 seconds) can be programmed.

IN GROUP/OUT OF GROUP

Individuals assigned to a station hunt group may temporarily remove their telephones from the group by pressing the In/Out of Group button providing that there is someone still in the group. Stations out of a group will not receive calls to that group but will continue to receive calls to their individual extension numbers. When desired, the user may put him/herself back into the group by pressing the button again. Users who do





not have this button may dial the access code and the group desired. A station user is allowed to be in several groups, providing a key and the extender of that group are assigned for each group on the user's phone.

INCOMING CALL DISTRIBUTION

Incoming calls can be assigned to ring a distributed station hunt group. This will allow all members of the group to share the call load.

INCOMING/OUTGOING SERVICE

Outside lines are available for incoming or outgoing service. Programming allows any outside line to be used for incoming calls only, outgoing calls only or both-way service.

INDIVIDUAL LINE CONTROL

Each station in the system can be individually programmed to allow or deny dialing out as well as allow or deny answering for each outside line.

LEAST COST ROUTING

Least Cost Routing (LCR) is the ability to automatically select the appropriate trunk group for the number dialed by any station. LCR can become quite complicated to understand and program but does allow highly complex dialing decisions. The DCS COMPACT's LCR package includes the following features:

- Option to use or not use LCR
- Programmable LCR access code
- Digit analysis table—ten digits each with 500 entries
- Routing by time of day
- Routing according to individual station class
- Modify digits table—100 entries
- Flexible trunk group advance timer
- Option to use or not use trunk group advance warning tones

LIVE SYSTEM PROGRAMMING

The system can be programmed from any display keyset without interrupting normal system operation. There are three levels of programming: TECHNICIAN, CUSTOMER and STATION. The technician level has access to all programs and can allow the customer access to system programs as needed. Technician and customer access are controlled by different security passcodes.

MEET ME PAGE AND ANSWER

After a user makes a Meet Me Page, the user may remain off-hook to allow the paged party to meet the user for a private conversation.





MEMORY PROTECTION

In the event that power is lost to the system, all customer data contained in the RAM pack is retained by the use of a Ni-Cd (or NICAD) battery for approximately thirty days. In addition, the CPCMMC computer program may be used to produce a backup copy of the customer data.

MESSAGE WAITING INDICATIONS

When calling a station and receiving a busy signal or no answer condition, the caller can leave an indication that a message is waiting. The message button will light red at the messaged keyset. A single line phone will receive a distinctive message waiting dial tone. Five message waiting indications can be left at any station.

MICROPHONE ON/OFF PER STATION

The microphone can be disabled at any keyset. When a microphone is disabled, the keyset cannot use the speakerphone although on-hook dialing and group listening are still possible.

MUSIC ON HOLD—FLEXIBLE

When external music sources are connected, each C.O. line may be programmed to receive one of the two external sources, internally-generated tones or no music when it is placed on hold. If there are no sources installed, each line may receive either a 50 ms tone or no music. The system-generated tone is a beep every 3.5 seconds.

NIGHT SERVICE

The DCS COMPACT provides separate ringing locations for all trunks in both the DAY and the NIGHT modes.

NIGHT SERVICE (AUTOMATIC)

Automatic night service allows the system to automatically go in and out of night service according to the system clock. There are separate time options available for each day of the week. This feature can be overridden by a manual night service key.

OFF PREMISES EXTENSIONS (OPX)

A single line (tip and ring) extension from a 2 SLI card may be connected to telephone company-provided OPX circuits to remote locations.

OPERATOR GROUP

Any number of stations can be assigned to the operator group for answering incoming calls. Calls to this group can be set for distributed, sequential or unconditional ringing. Operators can use the In/Out of Group feature to meet flexible operator requirements.





OVERFLOW

When calls ringing a station group go unanswered, they can overflow to another destination after a pre-programmed period of time. Each station group has its own timer. The overflow destination can be a station or station group.

PAGING

System software allows the use of four internal and four external paging zones. Stations can page any individual zone, all internal zones, all external zones or all zones simultaneously. Using system programming, each station may be allowed or denied the ability to make or receive page announcements to any zone or combination of zones.

POWER FAILURE TRANSFER

Each system is equipped with two power fail relays. If power fails, these relays can be used to re-route the first two C.O. lines on the card to single line telephones. When power is restored to the system, the lines and stations return to normal operation and calls in progress will be disconnected.

PRIMELINE SELECTION

Any station can be programmed to select a specific line, line group, telephone number, station or station group.

PRIVATE LINES

For private line use, stations can be prevented from dialing and/or answering any line.

PROGRAMMABLE LINE PRIVACY

Each outside line can be programmed to ignore the automatic line privacy. This allows up to four other parties to join your conversation by simply pressing the line button. This is similar to 1A2 key telephone operation.

PROGRAMMABLE TIMERS

There are over 35 programmable system timers to allow each installation to be customized to best fit the end user's application.

RECALLS

Calls put on hold, transferred or camped-on to any station will recall to the originating station if not answered within a programmable period of time. A recall that goes unanswered for the attendant recall timer will recall to the system operator group. Hold, transfer, camp-on and attendant recalls have individual programmable timers. Calls recalling to buttons with tri-colored LEDs will flash amber.





REMOTE PROGRAMMING

Remote programming allows the technician to access the system database from a remote location for the purpose of making changes to the customer data. Customer-provided modems and a PC using an optional software package will be needed to implement this feature. A PC can also be connected directly to a MISC card for on-site programming.

RING OVER PAGE

Any outside line can be programmed to ring over a customer-provided paging system. Outside lines, door phones and station groups may ring over page in the DAY or NIGHT mode.

SINGLE LINE CONNECTIONS

Single line ports allow for connection of a variety of single line telephones plus facsimile machines, answering machines, loud bells, computer modems, cordless phones and credit card machines. When connecting customer-provided equipment to these extensions, compatibility should be checked out before purchase to ensure correct operation.

SPEED DIAL NUMBERS (1500)

A library of up to 1500 speed dial numbers may be allocated as needed. RAM Pack 1 provides 500 speed dial numbers. RAM Pack 2 and Caller ID/CTI software provide 1500 speed dial numbers. The system list can have up to 500 numbers and each station can have up to 50 numbers. Speed dial numbers are assigned in blocks of ten. Each speed number may contain up to 18 digits.

STATION HUNT GROUPS (30)

System programming allows for up to 30 station hunt groups. One of three ring patterns are available for each group: SEQUENTIAL, DISTRIBUTED and UNCONDITIONAL. Each group may contain a maximum of 30 stations and a station may be in more than one group. The default directory numbers to call these groups are 501–529. Group 500 is reserved for the operator group and is called by dialing “0.” Each station group has its own recall timer for calls transferred to that group.

STATION HUNT GROUPS (UCD)

The UCD group option allows callers in queue at a UCD group to be temporarily diverted to a customer-provided announcement device and then placed back in the queue. A wrap-up timer allows agents to complete paperwork before receiving the next UCD call.

STATION MESSAGE DETAIL RECORDING (SMDR)

The system provides, via an optional MISC card, records of calls made, received and transferred. Connecting a customer-provided printer or call accounting system will allow for collection of these records. Each call record provides details of station number,





outside line number, start date, start time, duration of call, digits dialed (maximum 18) and an account code if entered. The system may print a header followed by 50 call records per page or send continuous records with no header for use with a call accounting machine. [See the sample printouts.](#)

The SMDR format contains many options that allow it to be customized to a company's individual needs. Options to print include incoming calls, outgoing calls, in and out of group status, change in DND status and authorization codes.

TOLL RESTRICTION

There are 500 allow and 500 deny entries of eleven digits each. Each of these entries can apply to dialing classes B, C, D, E, F and G. Expensive 976, 1-900, 411 and operator-assisted calls, as well as specific area and office codes, can be allowed or denied on a per-class basis. Class A stations have no dialing restrictions and Class H stations cannot make outside calls.

Any outside line may be programmed to follow station toll restriction or follow the toll restriction class assigned to it. Each station and trunk can have a day dialing class and a night dialing class.

TOLL RESTRICTION OVERRIDE

Program options allow for system speed dial numbers to follow or bypass a station's toll restriction class. In addition, users may make calls from a toll restricted station by using the toll restriction override code.

STONE OR PULSE DIALING

Outside lines can be programmed for either tone or pulse dialing to meet local telephone company requirements.

TRANSFER

System operation permits station users to transfer calls to other stations in the system. Transfers can be screened, unscreened or camped-on to a busy station.

TRUNK GROUPS (11)

Outside lines can be grouped for easy access by dialing a code or pressing a button. There are eleven trunk groups available. Access codes are 9 and 80–89.

UNIVERSAL ANSWER

Stations may dial the Universal Answer (UA) code or press the UA key to answer any outside lines programmed to ring the UA device. The UA device can be a station, group of stations, common bell or ring over page.





CONTENTS

VOICE MAIL INTEGRATION

This feature uses DTMF tones (inband signaling) to communicate with any compatible voice mail system. Stations can call forward to a voice mail system. When answered, the system will send DTMF tones routing the caller directly to the forwarded station user's mailbox. Keypad users can press one button to retrieve messages from the voice mail system.

Some additional options of this feature concern overflow and message retrieval. Because of the complex nature of this feature, check the DCS COMPACT Technical Manual for more details.

NOTE: Although most voice mail systems will work on the DCS COMPACT, the system data has default values set to work with the StarMail Voice Processing System.

WALKING CLASS OF SERVICE

This feature allows users to make calls or use features from a station that is restricted. Either use the WCOS feature code or the authorization code feature. Both methods will change the class of service to correspond with the passcode or authorization code that is dialed. After the call is completed, this station returns to its programmed class of service.





STATION FEATURES

[ADD-ON MODULE](#)
[APPOINTMENT REMINDER](#)
[AUTOMATIC HOLD](#)
[AUTOMATIC PRIVACY](#)
[BACKGROUND MUSIC](#)
[BUSY STATION CALLBACK](#)
[BUSY STATION INDICATIONS \(BLF\)](#)
[CALL FORWARDING](#)
[CALL PICKUP](#)
[DIAL BY NAME](#)
[DIRECT STATION SELECTION \(DSS\)](#)
[DO NOT DISTURB \(PROGRAMMABLE\)](#)
[DOOR LOCK RELEASE](#)
[EXCLUSIVE HOLD](#)
[GROUP LISTENING](#)
[HEADSET OPERATION](#)
[HEARING AID COMPATIBLE](#)
[LINE QUEUING WITH CALLBACK](#)
[LINE SKIPPING](#)
[MESSAGE WAITING LIGHT/INDICATION](#)
[MUTE MICROPHONE/HANDSET](#)
[OFF-HOOK RINGING](#)
[OFF-HOOK VOICE ANNOUNCE \(STANDARD\)](#)
[OFF-HOOK VOICE ANNOUNCE \(EXECUTIVE\)](#)
[ONE TOUCH DIALING KEYS](#)
[ONE TIME DO NOT DISTURB](#)
[ON-HOOK DIALING](#)

[PROGRAMMABLE KEYS](#)
[PROGRAMMED STATION MESSAGES](#)
[PROTECTION FROM BARGE-IN](#)
[PULLOUT DIRECTORY TRAY](#)
[PULSE TO TONE SWITCH OVER](#)
[REDIAL](#)
[AUTO RETRY](#)
[LAST NUMBER](#)
[SAVE NUMBER](#)
[REMOTE HOLD](#)
[RING MODES](#)
[AUTO ANSWER](#)
[RING—EIGHT TONE CHOICES](#)
[VOICE ANNOUNCE](#)
[RINGING PREFERENCE](#)
[SPEAKERPHONE](#)
[STATION LOCK](#)
[TRI-COLORED LIGHTS](#)
[VOLUME SETTINGS](#)
[HANDSET](#)
[BGM](#)
[RINGING](#)
[PAGING](#)
[SPEAKER](#)
[OFF-HOOK RING](#)
[WALL-MOUNTABLE KEYSETS](#)

4.2 STATION FEATURE DESCRIPTIONS

ADD-ON MODULE

The DCS COMPACT add-on module (AOM) adds to the capability of any keyset or can be used by itself whenever a handset and dial pad are not desired. The 32 programmable buttons can be used for feature keys, DSS/BLF keys or one touch speed dial buttons.

APPOINTMENT REMINDER

Keysets with an alarm key can be used like an alarm clock. Program in a specific time and the keyset will give a distinctive ring to remind you of meetings or appointments. Alarms can be set for “today only” or everyday at the same time. Up to three alarms may be set at each keyset. Display keysets can also view a programmed message when the alarm rings.





AUTOMATIC HOLD

Station users can enable or disable automatic hold at their keysets. While engaged on an outside (C.O.) call, pressing another trunk key, route key or CALL button automatically puts the call on hold when this feature is enabled. Pressing TRANSFER, CONFERENCE, PAGE or a DSS key will always automatically place a C.O. call on hold. This type of automatic hold is not a user-selectable option.

AUTOMATIC PRIVACY

All conversations on outside lines and intercom calls are automatically private. The privacy feature can be turned off on a per-C.O. line basis.

BACKGROUND MUSIC

When customer-provided music sources are connected, each keyset user may listen to background music. The HOLD button turns BGM on or off and the volume is controlled by the volume control keys. One source is located in the KSU. A second source is located on the optional MISC card.

BUSY STATION CALLBACK

When reaching a busy station, callers may request a callback by pressing one button or dialing a code. The system rings the caller back when that station becomes idle (a system-wide maximum of 100 callbacks are allowed at one time including busy station and busy trunk).

BUSY STATION INDICATIONS (BLF)

DSS/BLF keys may be assigned to any keyset or add-on module. These buttons will be off when the station is idle, light red when that station is in use and flash distinctively when that station is in DND mode.

CALL FORWARDING

Station users can forward internal and outside calls to other destinations immediately (Forward All), when busy (Forward Busy) or if not answered in a programmable number of seconds (Forward No Answer). These forward destinations can all be different. Once a destination has been programmed, it can be turned on and off with a programmable key. Forward All Calls takes priority over Busy and No Answer conditions. In addition to the three usual methods of forwarding described above, a fourth option called Follow Me is available. This option allows station users to set a Forward All condition from their station to another station while at the remote station.

Keyset users can also be given an External Call Forward button to forward their calls to an external phone number. Each outside line may be programmed to either follow or ignore station call forwarding. A per-station option allows internal calls to either forward or not forward to voice mail. Single line telephone users must have the system administrator program this feature for them.





CALL PICKUP

With directed call pickup, a user can answer new calls ringing at any station by dialing a code plus that extension number. The group pickup feature allows you to answer any call ringing within a pickup group. Pickup keys may be customized with extenders to allow pickup from a specific station or pickup group. The DCS COMPACT has 20 programmable pickup groups.

DIAL BY NAME

Each system and personal speed dial number can have an associated directory name. A speed dial number can be selected by scrolling alphabetically through the directory name list. This on-line “directory” allows the user to look up and dial numbers in seconds.

DIRECT STATION SELECTION (DSS)

Programmable keys can be assigned as DSS keys and associated with extension numbers. Users press these keys to ring or transfer C.O. calls to the assigned stations.

DO NOT DISTURB (PROGRAMMABLE)

The Do Not Disturb (DND) feature is used to stop all calls to a station. System programming can allow or deny use of the DND feature for each station. Parties calling a station in DND will receive reorder tone. When in the DND mode, calls may be forwarded to another destination. [See Forward DND option](#). There is also a programmable option to allow a C.O. line to override DND at its ring destination if that destination is a single station.

DOOR LOCK RELEASE

Stations programmed to receive calls from a door phone can dial a code to activate a contact closure for control of a customer-provided electronic door lock.

EXCLUSIVE HOLD

Pressing the HOLD button twice will hold a call exclusively at that station so no other station can pick up that call. Intercom calls are automatically placed on exclusive hold.

GROUP LISTENING

A keyset assigned this feature button may turn on the speaker while using the handset. This allows a group of people to listen to the distant party over the speaker without turning on the microphone.

HEADSET OPERATION

Every keyset can be programmed to allow for the use of a headset. In the headset mode, the hookswitch is disabled and the ANS/RLS key is used to answer and release calls. Keyset users may turn headset operation ON/OFF by keyset programming or more easily by pressing the headset ON/OFF key. The headset key lights steady red when the keyset is in headset mode. The ANS/RLS key lights if headset mode is activated by keyset programming only.





HEARING AID COMPATIBLE

All DCS keysets are hearing aid compatible as required by Part 68 of the FCC requirements.

LINE QUEUING WITH CALLBACK

When the desired outside line is busy, the user can press the CALLBACK key or dial the access code to place his/her station in a queue. The user will be called back when the line is available (a maximum of 100 callbacks are allowed system-wide at one time including busy station and busy trunk).

LINE SKIPPING

When you are talking on an outside line and the automatic hold feature is turned off, you may directly press another idle line key and skip to that line without causing the previous call to go on hold.

MESSAGE WAITING LIGHT/INDICATION

When a message indication is left at a keyset, the MESSAGE button will slowly flash red. Single line telephone users will receive a distinctive dial tone to notify them that a message is waiting. Message waiting indications can be left for any station.

MUTE MICROPHONE/HANDSET

Any keyset can mute the handset transmitter by pressing a MUTE key. In addition, keysets can also mute the keyset microphone while in speakerphone mode.

OFF-HOOK RINGING

When a keyset is in use, the system will provide an off-hook ring signal to indicate that another call is waiting. The ring signal is a single repeated ring. The interval is controlled by a system-wide timer. Single line stations will receive a tone burst through the handset receiver instead of a ring.

OFF-HOOK VOICE ANNOUNCE

STANDARD

Keysets may receive a voice announcement while on another call. The calling station must have an OHVA key. When transferring a call to a busy keyset or while listening to busy signal, the station user can press the OHVA key to make an OHVA call to the busy keyset. If the called keyset is in the DND mode, it cannot receive OHVA calls.

EXECUTIVE

A keyset associated with an add-on module (AOM) may receive an executive off hook voice announcement while on another call. The called keyset may reply handsfree





without interrupting the call in progress. Only keysets with an off-hook voice announce button (OHVA) can off-hook voice announce to keysets with AOMs.

ONE TIME DO NOT DISTURB

The Do Not Disturb (One Time) feature is used to stop all calls to a station when the user is on an outside line and does not want to be disturbed for the duration of the call. Upon completion of the call, DND is canceled and the station is returned to normal service. This feature requires a programmed button.

ONE TOUCH DIALING KEYS

Frequently used speed numbers can be assigned to one touch dialing keys for fast accurate dialing.

ON-HOOK DIALING

Any keyset can originate calls without lifting the handset. When the called party answers, speak into the microphone or lift the handset for more privacy.

PROGRAMMABLE KEYS

The LCD 24B and STD 24B keysets have 24 programmable keys and the LCD 12B and Basic 12B keysets have 12. Each key can be programmed for over 25 different uses, personalizing each phone. Examples of keys include: individual outside line, individual station, group of lines, group of stations and one touch speed dial buttons. Using these keys eliminates dialing access codes.

The following keys have extenders that identify what station, group or number that feature key applies to: SPEED DIAL KEY, PAGE, DSS, DIRECTED PICKUP, GROUP PICKUP, DOOR PHONE, BOSS, PROGRAMMED MESSAGE and FWD.

PROGRAMMED STATION MESSAGES

Any station may select one of twenty messages to be displayed at a calling party's keyset. Ten messages are factory-programmed and the remaining ten can be customized by the system administrator (16 characters maximum).

NOTE: The calling party must have a display keyset to view these messages.

PROTECTION FROM BARGE-IN

Each station can be programmed as secure or not secure. Secure stations cannot be barged-in on. A non-secure station talking to a secure station cannot be barged-in on.

PULLOUT DIRECTORY TRAY

A pullout directory tray is conveniently located beneath all keysets. Use this to record station directory names and speed dial numbers.





PULSE TO TONE SWITCH OVER

When dialing a number on a dial pulse network, a station user can dial # and the DCS COMPACT system will begin to send DTMF.

REDIAL

There are three types of external redial available to all station users. Each type can redial up to a maximum of 18 digits.

- **AUTO RETRY**—When you dial an outside number and receive a busy signal, use the auto retry feature to reserve the outside line and automatically redial the number for a programmable number of attempts.
- **LAST NUMBER**—The most recent number dialed on a C.O. line is saved and may be redialed by pressing the redial key or dialing the LNR access code.
- **SAVE NUMBER**—Any number dialed on a C.O. line may be saved for redial at a later time.

REMOTE HOLD

When you wish to place a call on hold at another station, press TRSF and dial the station number (or press the appropriate DSS key). Press the HOLD key. This will place the call on system hold on an available CALL button or Line Key at the remote station.

RING MODES

Each keyset user can select one of three distinct ways to receive intercom calls. The phone can automatically answer on the speakerphone, voice announce through the speaker or receive ringing. When the ring mode is selected, keyset users can choose one of eight distinct ring tones. Another option is Forced Auto Answer, which is invoked by the calling station and controlled by the calling station's class of service.

RINGING PREFERENCE

Lifting the handset or pressing the speaker button automatically answers a call ringing at the keyset. By using this method, users will assured of answering the oldest call first. When ringing preference is turned off, the user must press the flashing button to answer. Users may answer ringing lines in any order by pressing the flashing button.

SPEAKERPHONE

LCD 24B, STD 24B, LCD 12B and Basic 12B keysets have a built-in speakerphone. The speakerphone enables calls to be made and received without the use of the handset.

STATION LOCK

By using a programmable personal station passcode, any keyset can be locked and unlocked. A locked keyset cannot be used to make or receive calls.





CONTENTS

TRI-COLORED LIGHTS

LCD 24B and STD 24B keysets have 16 keys equipped for tri-colored LED indications (green, red and amber). LCD 12B and Basic 12B models have six of these keys. To avoid confusion, your calls always light green, other calls show red and recalls light amber.

VOLUME SETTINGS

Each keyset may separately adjust the volume of the ringer, speaker, handset receiver, BGM, page announcements and off-hook ring tone. DCS keysets use UP and DOWN keys to adjust volume levels.

WALL-MOUNTABLE KEYSETS

Each keyset, add on module and 64 button module can be wall mounted by reversing the base wedge. The newest base wedge may not fit all wall mounting scenarios so in these cases the original wall mount/base wedge unit should be used.





DISPLAY FEATURES

[ACCOUNT CODE DISPLAY](#)
[CALL DURATION TIMER](#)
[CALL FOR GROUP IDENTIFICATION](#)
[CALL PROCESSING INFORMATION](#)
[CALLING PARTY NAME](#)
[CALLING PARTY NUMBER](#)
[CONFERENCE INFORMATION](#)
[DATE AND TIME DISPLAY](#)
[DIALED NUMBER](#)

[ENHANCED STATION PROGRAMMING](#)
[IDENTIFICATION OF RECALLS](#)
[IDENTIFICATION OF TRANSFERS](#)
[MESSAGE WAITING CALLER NUMBER](#)
[OUTSIDE LINE IDENTIFICATION](#)
[OVERRIDE IDENTIFICATION](#)
[PROGRAMMED MESSAGE DISPLAY](#)
[SOFT KEYS](#)
[STOPWATCH TIMER](#)

4.3 DISPLAY FEATURE DESCRIPTIONS

ACCOUNT CODE DISPLAY

Account codes are conveniently displayed for easy confirmation. If entered incorrectly, users may press the ACCOUNT key again and reenter the account code.

CALL DURATION TIMER

The system can automatically time outside calls and show the duration in hours, minutes and seconds. Station users may manually time calls by pressing the TIMER button.

CALL FOR GROUP IDENTIFICATION

When a call is made to a station group, the display will show [CALL FOR GROUP] and the user's group number. These calls can be answered with a different greeting than calls to the user's extension number.

CALL PROCESSING INFORMATION

During everyday call handling, the keyset display will provide information that is helpful and in some cases invaluable. Displays such as [CALL FROM 201], [TRANSFER TO 202], [701 RINGING], [CALL IS WAITING], [TRSF FROM 225], [208 BUSY], [CAMPON TO 236], [RECALL FROM 204], [CALL FOR 501], [MESSAGE FROM 201], [FORWARD FROM 260] and [705 ON HOLD] keep users informed of what is happening and where they are. In some conditions, the user is prompted to take action and in other cases the user receives directory information.

CALLING PARTY NAME

For intercom calls, LCD 24B keysets show the calling party's name before answering. Names must be stored in the system directory list and can be up to ten characters long.

CALLING PARTY NUMBER

When receiving an intercom call, all display stations show the calling party's extension number before the call is answered.





CONFERENCE INFORMATION

When setting up a conference, each extension and outside line number is displayed at the controlling station when it is added. When a station is added to a conference, its display will show [CONFERENCE XXX] alerting the user that other parties are on the line.

DATE AND TIME DISPLAY

In the idle condition, the current date and time are conveniently displayed. Display keysets can have a 12 or 24 hour clock in either ORIENTAL or WESTERN display format with information shown in uppercase or lowercase.

DIALED NUMBER

When a user makes an outside call, the digits dialed are displayed as the user dials them. If the display indicates an incorrect number has been dialed, the user can quickly hang up before billing begins.

ENHANCED STATION PROGRAMMING

Personal programming options are easier to select and confirm with the help of the display.

IDENTIFICATION OF RECALLS

Hold recalls and transfer recalls are identified differently. Hold recalls show [HOLD RECALL 7XX] and transfer recalls show [RECALL FROM XXX].

IDENTIFICATION OF TRANSFERS

The display will identify who transferred a call to the user [TRANSFER FROM XXX].

MESSAGE WAITING CALLER NUMBER

When the message indication is on, pressing the MSG button will display the station number of the person who has messages for the user. Display keysets can scroll up and down to view message indications.

OUTSIDE LINE IDENTIFICATION

Each line can be identified with a ten character name. Incoming calls ringing at your station will display this name before the call is answered. This feature is helpful when individual lines need to be answered with different greetings.

OVERRIDE IDENTIFICATION

If another station barges-in on a user's conversation, the display will alert the user with an [OVERRIDE CALL] display if the system is set for barge-in with tone.





CONTENTS

PROGRAMMED MESSAGE DISPLAY

Preprogrammed station messages set by other stations can be viewed at the user's station.

SOFT KEYS

Below the display there are three soft keys and a scroll button. These keys allow the user to access features in his/her class of service without requiring the keyset to have a designated feature key.

STOPWATCH TIMER

Display keyset users will find this feature very convenient to time meetings, calls and other functions. Users simply press to start the timer and press again to stop the timer.






SAMPLE DISPLAYS


PROSTAR LCD 12B and LCD 24B display model keysets have a large, easy-to-read, 32 character liquid crystal display. Helpful call processing information is provided so everyday call handling is quick and easy. Here are just some of the displays you may see.




Idle display shows extension, name, day, date and time.

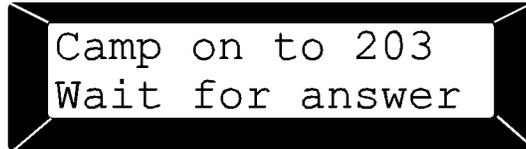


This station is camped-on to extension 203 and is waiting for 203 to answer.

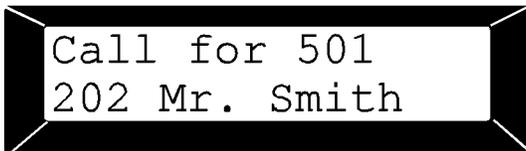


This station in the sales department is receiving a group call from Mr. Smith.

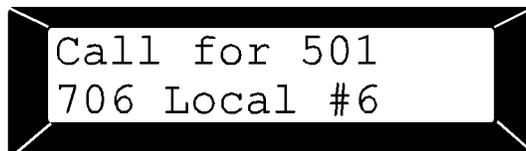


This display tells you this is a new incoming call to the sales department.

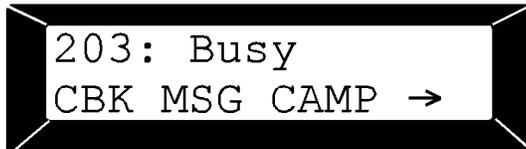


This station is calling station 203 which is currently busy.

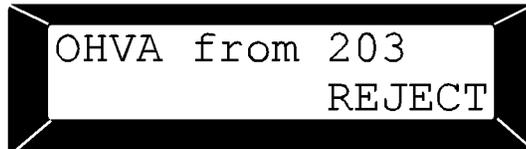


This station is receiving an off-hook voice announcement from station 203.

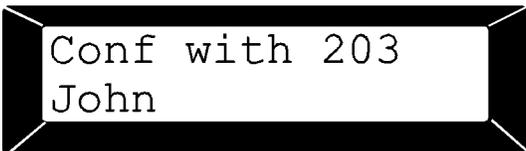


This station is on a conference call with John, extension 203. Assume other parties will hear your conversation.

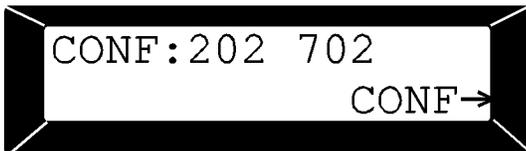

This station is on a conference call with extension 202 and trunk 702 and has the option to add two more parties.

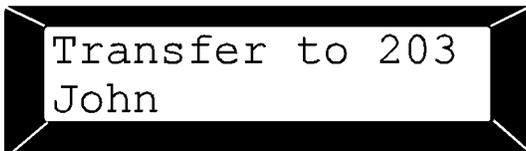

This station is transferring a call to John at extension 203.

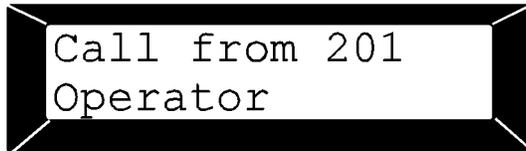

This station is receiving a call from extension 201.



This station is setting the Do Not Disturb feature.




This station is speaking on trunk 703.






SAMPLE CALLER ID DISPLAYS

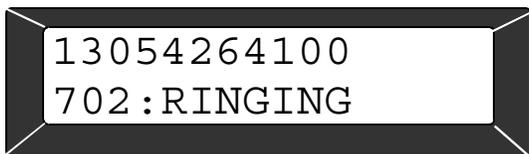

This display shows an incoming call from 1-305-426-4100 on Line 702 ringing directly at your station.



This display shows the information on the abandoned call list. This call came in on May 25 at 9:41 A.M. on line 702. The user can CLEAR the entry, DIAL the caller back or examine further NND information.

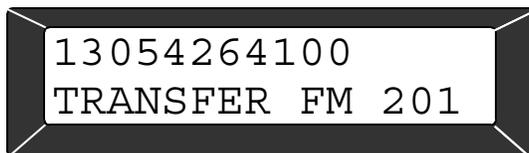


This display shows a call from 1-305-426-4100 that has been transferred to you from station 201.



This display shows an entry in a station review list showing the three initial options. The arrow indicates other options available to you by pressing the SCROLL key.



This display shows an investigation of a station that is talking to Samsung Telecom. Investigator can BARGE-in to the conversation, DROP the call from the system or examine further NND information.

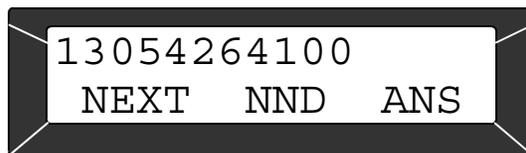


This display is seen while examining calls in queue at your keyset.



This display shows an incoming call from Samsung Telecom ringing at group 500.



This display can be seen when investigating an intercom call. The investigator can BARGE-in or DROP the connection.

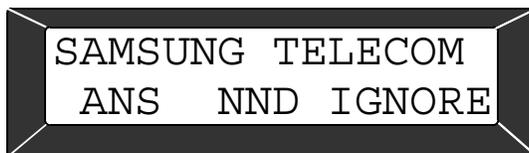

This display is seen while using the INQUIRE feature. It shows the three options available while you are checking on a held or parked call.




SMDR REPORT FOR [Samsung R & D] 09/23/94 17:30



CONTENTS

T	EXT	AUTH	TRK	MM/DD	STT.TIME	DURATION	FG	DIALED	DIGIT	ACCOUNT	CODE
1	208		705	09/23	16:12:33	00:05:12	OT	12145551234567			
1	226		703	09/23	16:13:31	00:00:29	IT				
1	202		703	09/23	16:14:00	00:00:25	TT				
1	210		704	09/23	16:15:28	00:01:52	O	4205069		1234567890*#	
1	201		702	09/23	16:15:51	00:01:45	I				
1	211		703	09/23	16:19:53	00:00:25	T			987654321012	
1	204	5555	703	09/23	16:18:16	00:01:57	O	4205068			
1	208		702	09/23	16:21:12	00:00:19	IT				
1	210			09/23	16:21:31	00:04:15		ALARM RINGING			
1	211		706	09/23	16:20:59	00:02:43	O	18005551234			
1	208			09/23	17:04:10			DND ON			
1	208			09/23	17:12:07			DND OFF			
1	207			09/23	17:12:05			GROUP OUT			
1	207			09/23	17:16:55			GROUP IN			
1			735	09/23	17:17:15	00:00:11	DE	3833			
1	209		735	09/23	17:17:38	00:00:30	DI				
1	735		709	09/23	17:18:08	00:12:19	DO	13055551234			
1	706		701	09/23	17:25:15	00:00:28	FI				
1	701		706	09/23	17:25:15	00:10:25	FO	4205071			
1	312	2326	705	09/23	18:00:03	00:08:12	O	13054264100		232552779600	

4.4.1

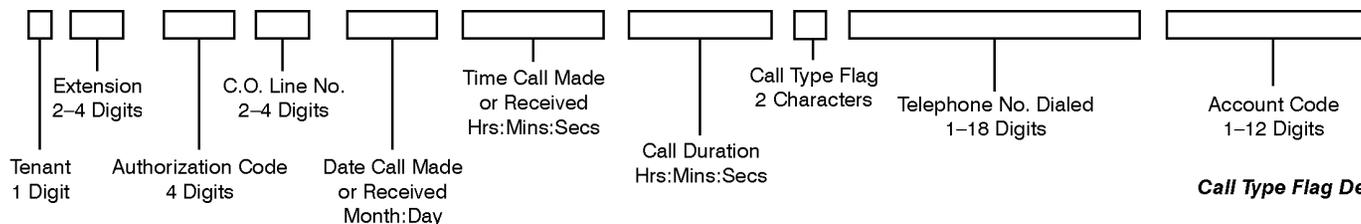

Call Type Flag Definitions

- | | | | |
|----|-----------------------------------|----|---|
| O | Outgoing Call | DE | DISA call with error |
| I | Incoming Call | T | Transferred call that was terminated |
| DI | DISA call in | IT | Incoming transfer |
| DO | DISA call out | FI | Incoming call forwarded to an external number |
| FO | Outgoing record of forwarded call | OT | Outgoing transfer - Outgoing call made and transferred |
| | | TT | Caller received a transferred call and transferred it again |

4.4 SAMPLE SMDR PRINTOUT (WITHOUT CALLER ID)






CONTENTS

T	EXT	AUTH	TRK	MM/DD	STT.TIME	DURATION	FG	DIALED	DIGIT	ACCOUNT CODE	CID NUMBER	CID NAME
1	201		701	01/02	17:15:13	00:00:28	IT				13054264100	SAMSUNG TELECOM
1	205		701	01/02	17:15:41	00:00:02	T				13054264100	SAMSUNG TELECOM
1	217		702	01/02	17:24:49	00:00:25	IT				13055557890	CURTIS SMITH
1	202		702	01/02	17:25:14	00:00:03	T				13055552354	SUSAN HOLLINS
1	202		702	01/02	17:25:56	00:00:00	O	4264100				
1	217		702	01/02	17:26:35	00:00:11	IT				13054264385	SAMSUNG TELECOM
1	203		702	01/02	17:26:46	00:00:16	T				13054264385	SAMSUNG TELECOM
1	203		702	01/02	17:27:13	00:00:20	O	4264385				
1	203		702	01/02	17:28:04	00:00:00	O	4264385				
1	201		701	01/02	17:28:34	00:00:04	IT				13055559748	JOAN LEVIN
1	203		701	01/02	17:28:38	00:00:14	T				13055558703	LENNY WILKINS
1	203		702	01/02	17:29:54	00:01:27	OT	5556420				
1	205		702	01/02	17:31:06	00:03:00	TT				13055556420	PIZZA DELIVERY
1	209		702	01/02	17:33:24	00:02:18	T				13055556420	PIZZA DELIVERY
1			701	01/02	17:41:45	00:00:30	A				13055553426	TERRY PRUITT
1			701	01/02	17:42:15	00:00:02	A				13055554676	BLANCHE MARKER
1	203		702	01/03	17:51:17	00:00:22	O	5555069				
1			701	01/03	17:56:02	00:00:05	A				13055556733	ALEX DAULTON
1			701	01/03	17:56:07	00:00:54	A				13055559723	CHAZ NEWMAN

4.5.1

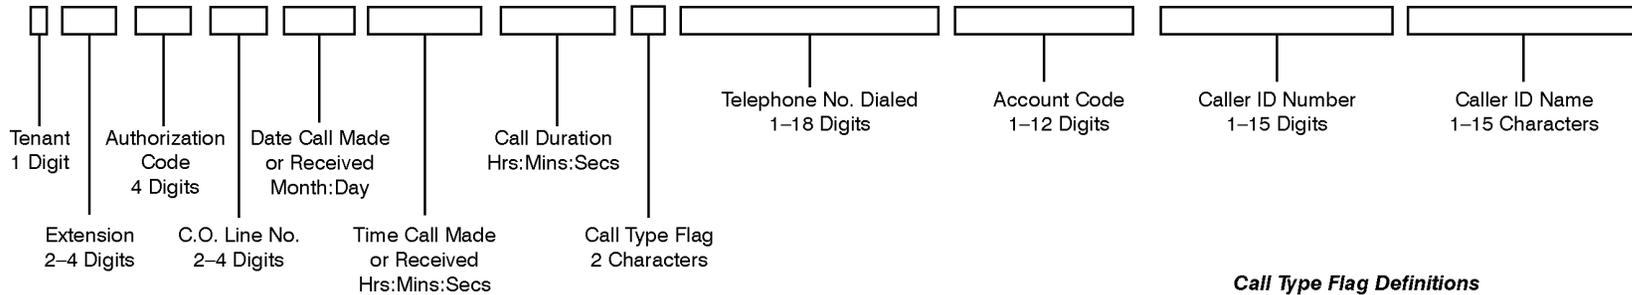

Call Type Flag Definitions

- 0 Outgoing Call
- I Incoming Call
- DI DISA call in
- DO DISA call out
- FO Outgoing record of forwarded call
- A Abandoned call
- DE DISA call with error
- T Transferred call that was terminated
- IT Incoming transfer
- FI Incoming call forwarded to an external number
- OT Outgoing transfer - Outgoing call made and transferred
- TT Caller received a transferred call and transferred it again



4.5 SAMPLE SMDR PRINTOUT (WITH CALLER ID)



PART 5. USER INFORMATION

5.1 RADIO FREQUENCY INTERFERENCE

WARNING: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses and can radiate radio frequency energy. If not installed and operated in accordance with the instruction manual, it may cause interference with radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to connect the interference at his own expense.

The following measures can be tried:

1. Reorient the receiving antenna.
2. Relocate the telephone with respect to the receiver.
3. Move the telephone equipment away from the receiver.
4. Plug the Key Service Unit into a different AC outlet so that the KSU and receiver are on different circuits.

5.2 FCC REQUIREMENTS

The DCS COMPACT electronic telephone system complies with Part 68 of the Federal Communications Commission Rules and Regulations.

UNAUTHORIZED MODIFICATIONS

Any changes or modifications performed on this equipment that are not expressly approved in writing by SAMSUNG TELECOMMUNICATIONS AMERICA could cause non-compliance with the FCC rules and void the user's authority to operate the equipment.

NOTIFICATION TO TELEPHONE COMPANY

The customer must notify the telephone company of the particular line to which the connection will be made and provide it with the FCC registration number and the Ringer Equivalence Number (REN) of the protective circuit.

FCC Registration Numbers: A3LKOR-21433-KF-E or A3LKOR-21434-MF-E

Ringer Equivalence Number: 0.5 B

TELEPHONE CONNECTION REQUIREMENTS

The Federal Communications Commission (FCC) has established rules which permit the DCS COMPACT to be connected directly to the telephone network using telephone company network access jacks.





CONTENTS

5.3 TELEPHONE COMPANY INTERFACES		
CIRCUIT TYPE	FIC	NETWORK JACK
C.O. LINE—LOOP START	O2LS2	RJ21X RJ11C RJ14C
E & M TIE LINE	TL11M	RJ2GX
OFF PREMISES EXTENSION	OL13C	RJ21X RJ11C RJ14C

NOTE: Allowing this equipment to be operated in such a manner as to not provide for proper answer supervision is a violation of part 68 of the FCC’s rules.

RINGER EQUIVALENCE (REN)

The REN is used to determine the quantity of devices which may be connected to the telephone line. Excessive RENs on the telephone line may result in the devices not ringing in response to an incoming call. In most but not all areas, the sum of the RENs should not exceed 5.0. To be certain of the number of devices that may be connected to the line, as determined by the number of RENs, contact the telephone company to determine the maximum REN for the calling area.

INCIDENCE OF HARM

If the terminal equipment, the DCS COMPACT, causes harm to the telephone network, the telephone company will notify you in advance that temporary discontinuance of service may be required. But if advance notice is not practical, the telephone company will notify the customer as soon as possible. Also, you will be advised of your right to file a complaint with the FCC if you believe it is necessary.

CHANGES TO TELEPHONE COMPANY EQUIPMENT OR FACILITIES

The telephone company may make changes in its facilities, equipment, operations or procedures that could affect the operation of the equipment. If this happens, the telephone company will provide advance notice in order for you to make the necessary modifications so that you may maintain uninterrupted service.

SERVICE CENTER

If trouble is experienced with the DCS COMPACT, please contact SAMSUNG TELECOMMUNICATIONS AMERICA at (305) 592-2900 for repair or warranty information. If the





trouble is causing harm to the telephone network, the telephone company may request that you remove the equipment from the network until the problem is resolved.

FIELD REPAIRS

Only technicians certified on the DCS COMPACT are authorized by SAMSUNG TELECOMMUNICATIONS AMERICA to perform system repairs. Certified technicians may replace modular parts of a system to repair or diagnose trouble. Defective modular parts can be returned to SAMSUNG TELECOMMUNICATIONS AMERICA for repair.

GENERAL

The equipment must not be used on coin telephone lines. Connection to party line service is subject to state tariffs.

HEARING AID COMPATIBILITY

All models of the DCS COMPACT are hearing aid compatible as specified in Part 68 of the FCC Rules.

5.4 SAFETY TESTS

The DCS COMPACT system has been tested to comply with safety standards in the United States as listed below. This system is listed with Underwriters Laboratories.

LISTED



83X3

E118093

5.5 MUSIC ON HOLD WARNING

IMPORTANT NOTICE: In accordance with US copyright laws, a license may be required from the American Society of Composers, Authors and Publishers (ASCAP) or other similar organizations if copyrighted music is transmitted through the Music on Hold feature. SAMSUNG TELECOMMUNICATIONS AMERICA hereby disclaims any liability arising out of failure to obtain such a license.

